



1W DC-DC Unregulated Single Output



- 1500VDC I/O isolation
- Operating temperature range -40~85°C without derating
- Internal SMD technology
- Built-in EMI filter
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- Dual in line package for SMA01
- SIP package for SMU01
- 100% full load burn-in test
- Industry standard pinout
- 2 years warranty

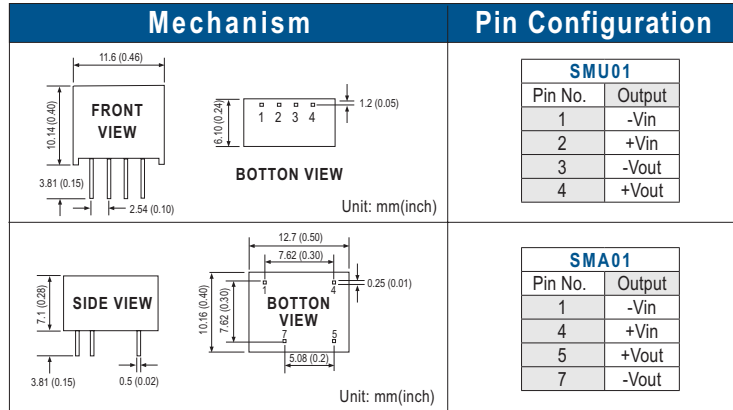

Voltage set point accuracy	±2% (max.)
Line regulation	±1.2% (max.) for 1% input variation
Load regulation	±8% (max.)@20~100% load
Input reflected ripple	100mVp-p
Efficiency	80% (typical)
Short circuit protection	Momentary
Switching frequency	100kHz (min.)
I/O isolation voltage	1500VDC (min.)
I/O isolation resistance	100MΩ (min.)@ 500VDC
Isolation capacitance	80pF (max.)
Working temperature	-40°C to +85°C (no derating)
Storage temperature	-25°C to +105°C
EMI	Compliance to EN55022 Class B, FCC part15 Class B

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SMU01L-05	5±10%	5	200	100
SMU01L-09	5±10%	9	110	100
SMU01L-12	5±10%	12	84	100
SMU01L-15	5±10%	15	67	100
SMU01M-05	12±10%	5	200	100
SMU01M-09	12±10%	9	110	100
SMU01M-12	12±10%	12	84	100
SMU01M-15	12±10%	15	67	100
SMU01N-05	24±10%	5	200	100
SMU01N-09	24±10%	9	110	100
SMU01N-12	24±10%	12	84	100
SMU01N-15	24±10%	15	67	100

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SMA01L-05	5±10%	5	200	100
SMA01L-09	5±10%	9	110	100
SMA01L-12	5±10%	12	84	100
SMA01L-15	5±10%	15	67	100
SMA01M-05	12±10%	5	200	100
SMA01M-09	12±10%	9	110	100
SMA01M-12	12±10%	12	84	100
SMA01M-15	12±10%	15	67	100
SMA01N-05	24±10%	5	200	100
SMA01N-09	24±10%	9	110	100
SMA01N-12	24±10%	12	84	100
SMA01N-15	24±10%	15	67	100