



# Test Report: IDLV-45-36

---

45W PWM Output LED Driver

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST

Environment Test

■ DESIGN VERIFY TEST


**OUTPUT FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM FREQUENCY	1KHz (±20%)	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	821Hz
2	VOLTAGE TOLERANCE	± 10%	I/P: 90 VAC / 295 VAC O/P: 70%/FULL/ NO LOAD Ta: 25°C	-0.25%~1.12%
3	OVER/UNDERSHOOT TEST	<±10 %	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	<±10%
4	SET UP TIME(Max)	500ms/230VAC 1200ms/115VAC	I/P: 230 VAC I/P: 115 VAC O/P: FULL /80%LOAD Ta: 25°C	336ms/230VAC 748ms/115VAC
<div style="display: flex; justify-content: space-around;"> <div style="width: 45%;"> <p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p> <p>Δ: 35.6 V @: 34.5 V Δ: 336ms @: 62.0ms</p> <p>Ch1 最大 37.4 V Ch1 最小 -2.20 V</p> <p>5.00 V 250 V 100ms 15.5 V</p> </div> <div style="width: 45%;"> <p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p> <p>Δ: 152 V @: 162 V Δ: 748ms @: 0.00 s</p> <p>Ch1 最大 37.3 V Ch1 最小 -2.00 V</p> <p>5.00 V 100 V 200ms 19.3 V</p> </div> </div>				
5	AUXILIARY DC OUTPUT (For A-Type only)	Nominal 12V (deviation 11.4~12.6) @50mA	I/P: 230 VAC O/P: FULL LOAD	11.92V

6 DIMMING TEST

※ Dimming principle for PWM style output

Dimming is achieved by varying the duty cycle of the output current.

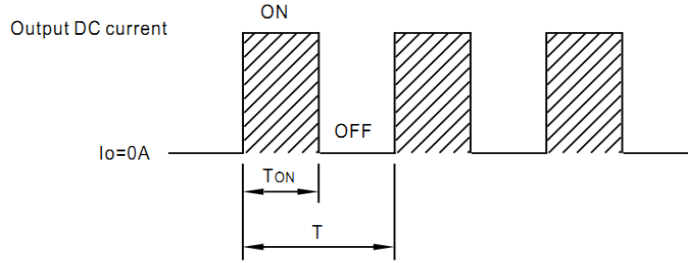


$$\text{Duty cycle(\%)} = \frac{T_{ON}}{T} \times 100\%$$


Output PWM frequency : 1KHz(±20%)

※ 2 in 1 dimming function


◎ Applying additive 0 ~ 10VDC

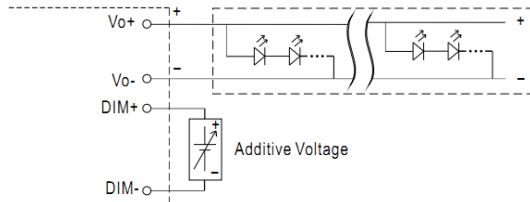


"DO NOT connect "DIM- to Vo-"

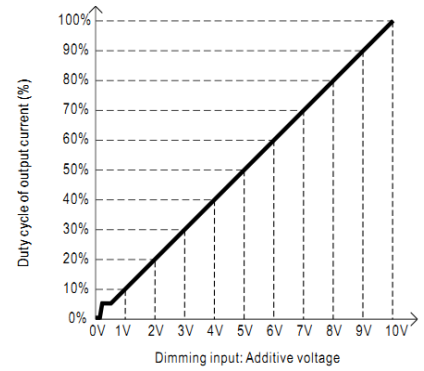

◎ Applying additive 10V PWM signal (frequency range 300~3000Hz):

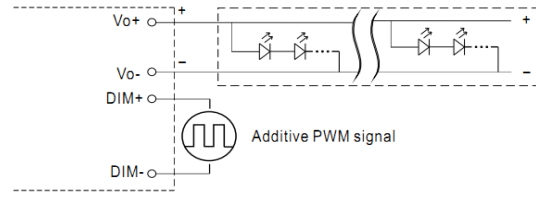

"DO NOT connect "DIM- to Vo-"

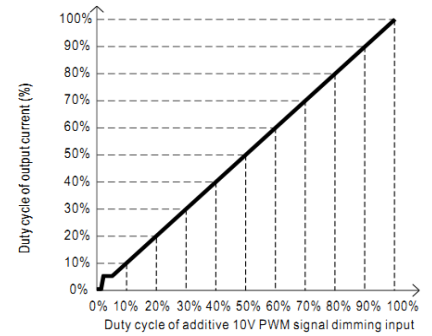

Note : 1. Min. duty cycle of output current is about 8% and the output current is not defined when 0% < Iout < 8%.

2. The duty cycle of output current could drop down to 0% when dimming input is about 0Vdc or 10V PWM signal with 0% duty cycle.

I/P: 230 VAC

O/P: DIMMING TEST

Ta: 25°C

	Dimming voltage	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
1	Output Current	0	0.12A	0.24A	0.36A	0.49A	0.61A	0.74A	0.87A	0.98A	1.10A	1.23A	1.23A
	Duty cycle of output current	0%	9.6%	19.2%	28.8%	39.2%	48.8%	59.2%	69.6%	79.4%	88.0%	98.4%	98.4%
	Dimming Duty cycle	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
2	Output Current	0%	0.12A	0.25A	0.37A	0.50A	0.63A	0.75A	0.88A	1.00A	1.14A	1.22A	1.23A
	Duty cycle of output current	0%	9.6%	20.0%	29.6%	40.0%	50.4%	60.0%	70.4%	80.0%	91.2%	97.6%	98.4%

TEST RESULT: OK




**INPUT FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~295VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	87V~305V
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+10V=305 V O/P: FULL/NO LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN ( POWER ON/OFF NO DAMAGE )	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 90 VAC ~295 VAC O/P: FULL~NO LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	0.6A/115VAC 0.4A/230VAC 0.3A/277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: 80%/FULL LOAD Ta: 25°C	I = 0.456A/ 115VAC I = 0.225A/ 230VAC I = 0.193A/ 277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-FG: 0.0029 mA N-FG: 0.0028 mA
5	NO LOAD POWER CONSUMPTION	< 0.5W for Blank-Type < 1.2W for A-Type	I/P: 230VAC O/P: NO LOAD Ta: 25°C	0.400W for Blank-Type 0.463W for A-Type
6	INRUSH CURRENT(Typ)	COLD START 30A/230VAC Twidth =150 us measured at 50% Ipeak	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I=25.7 A/ 230VAC Twidth = 120us

INPUT=230VAC/50HZ @ FULL LOAD

CH2: Input current CH1: AC Input Voltage

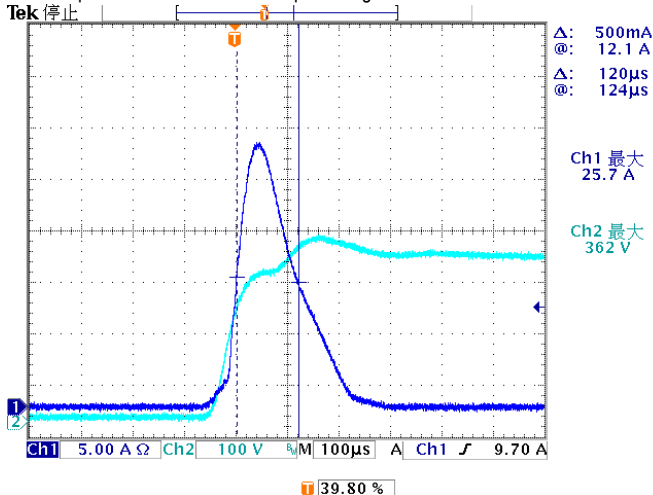




45W PWM Output LED Driver

IDLV-45 series


7	POWER FACTOR	0.95/ 115VAC 0.92/ 230VAC 0.9/ 277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: 80%/FULL LOAD Ta: 25°C	PF=0.996 /115VAC PF=0.980 /230VAC PF=0.951 /277VAC
---	--------------	---	--	--

PF vs LOAD

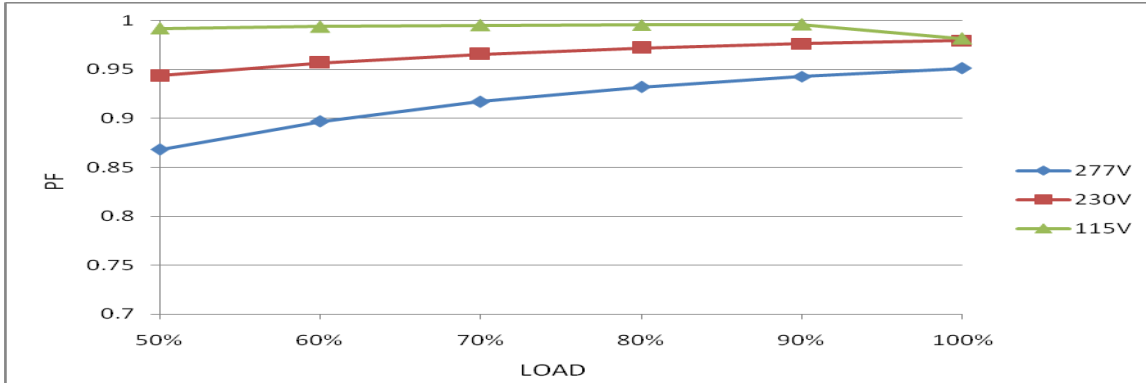


8	TOTAL HARMONIC DISTORTION	THD < 20% (@load ≥ 60%/115VAC, 230VAC; @load ≥ 75%/277VAC)	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: 60%/75% LOAD Ta: 25°C	THD=4.91% @60% load /115VAC THD=8.23% @60% load /230VAC THD=10.68% @75% load /277VAC
---	---------------------------	--	---	--

THD vs LOAD

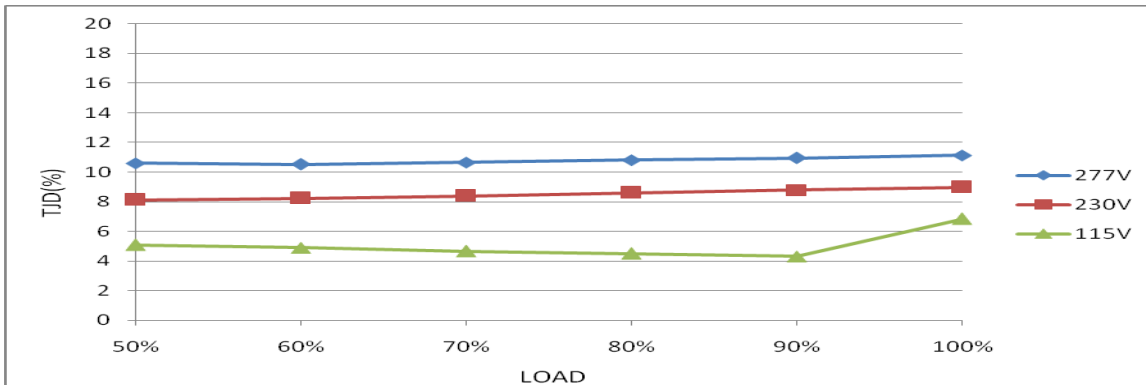

9	EFFICIENCY(Typ)	88%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	89.09%
---	-----------------	-----	---	--------

EFFICIENCY vs LOAD

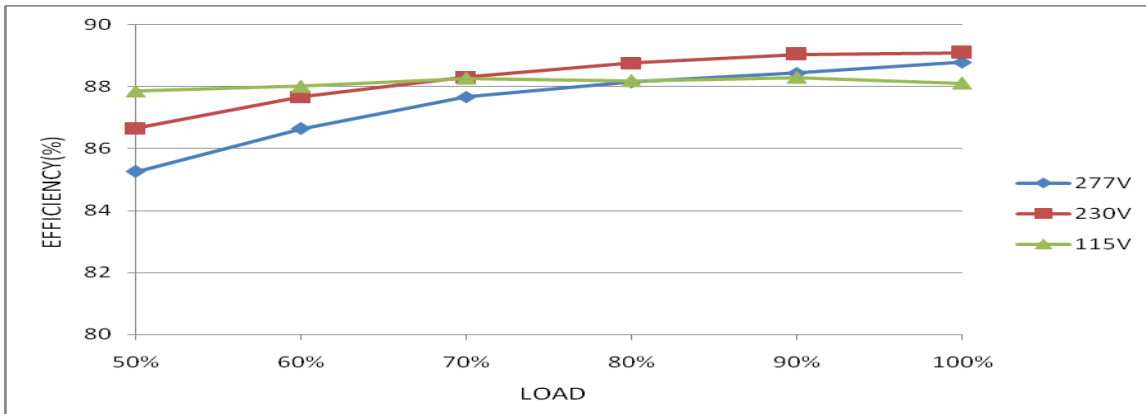



## PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER CURRENT PROTECTION	105%~ 115 %	I/P: 100VAC I/P: 230VAC I/P: 295VAC O/P: TESTING Ta: 25°C	104%/ 100VAC 105%/ 230VAC 105%/ 295VAC Hiccup mode, recovers automatically after fault condition is removed
2	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 90VAC I/P: 295VAC O/P: 70%/FULL LOAD Ta: 25°C	NO DAMAGE Shut down O/P voltage, re-power on to recovery

## COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 9 A/800V	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 680V (2) 634V (3) 640V
2	Diode Peak Voltage	D100 Rated 16A/400V	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 227V (2) 224V (3) 221V
3	Control IC Voltage Test	U1 Rated 35V	I/P: High-Line +3V =298V O/P: (1) Full Load input on/off (2) NO load input on /Off (3) Full Load /NO load Change Ta: 25°C	(1) 14.1V (2) 14.1V (3) 14.1V



## SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min	I/P-O/P: 4.2KVAC/min Ta: 25°C	I/P-O/P: 1.586mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500VDC Ta: 25°C	I/P-O/P: >9999MΩ

## E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230VAC/50HZ O/P: FULL /60% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
3	RADIATION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY Air: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
6	SURGE	EN61000-4-5 LIGHT INDUSTRY L-N: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
7	Test by certified Lab & Test Report Prepare			

■ **RELIABILITY TEST**

**ENVIRONMENT TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																
1	TEMPERATURE RISE TEST	MODEL: IDLV-45-36 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 27.9°C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 42.4°C																																																																		
		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 27.9°C</th> <th>HIGH AMBIENT Ta=42.4°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>L1</td><td>82.0°C</td><td>95.5°C</td></tr> <tr><td>2</td><td>BD1</td><td>78.1°C</td><td>91.3°C</td></tr> <tr><td>3</td><td>D1</td><td>88.8°C</td><td>102.6°C</td></tr> <tr><td>4</td><td>Q1</td><td>89.5°C</td><td>103.5°C</td></tr> <tr><td>5</td><td>U1</td><td>74.6°C</td><td>87.7°C</td></tr> <tr><td>6</td><td>T1</td><td>84.3°C</td><td>96.3°C</td></tr> <tr><td>7</td><td>C20</td><td>75.8°C</td><td>88.4°C</td></tr> <tr><td>8</td><td>D100</td><td>86.8°C</td><td>98.7°C</td></tr> <tr><td>9</td><td>C201</td><td>69.6°C</td><td>82.4°C</td></tr> <tr><td>10</td><td>Q100</td><td>60.0°C</td><td>73.4°C</td></tr> <tr><td>11</td><td>LF100</td><td>52.9°C</td><td>66.1°C</td></tr> <tr><td>12</td><td>C105</td><td>60.9°C</td><td>74.3°C</td></tr> <tr><td>13</td><td>C107</td><td>53.0°C</td><td>66.2°C</td></tr> <tr><td>14</td><td>R18</td><td>97.0°C</td><td>109.3°C</td></tr> <tr><td>15</td><td>TC</td><td>66.6°C</td><td>79.1°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 27.9°C	HIGH AMBIENT Ta=42.4°C	1	L1	82.0°C	95.5°C	2	BD1	78.1°C	91.3°C	3	D1	88.8°C	102.6°C	4	Q1	89.5°C	103.5°C	5	U1	74.6°C	87.7°C	6	T1	84.3°C	96.3°C	7	C20	75.8°C	88.4°C	8	D100	86.8°C	98.7°C	9	C201	69.6°C	82.4°C	10	Q100	60.0°C	73.4°C	11	LF100	52.9°C	66.1°C	12	C105	60.9°C	74.3°C	13	C107	53.0°C	66.2°C	14	R18	97.0°C	109.3°C	15	TC	66.6°C	79.1°C		
NO	Position	ROOM AMBIENT Ta= 27.9°C	HIGH AMBIENT Ta=42.4°C																																																																	
1	L1	82.0°C	95.5°C																																																																	
2	BD1	78.1°C	91.3°C																																																																	
3	D1	88.8°C	102.6°C																																																																	
4	Q1	89.5°C	103.5°C																																																																	
5	U1	74.6°C	87.7°C																																																																	
6	T1	84.3°C	96.3°C																																																																	
7	C20	75.8°C	88.4°C																																																																	
8	D100	86.8°C	98.7°C																																																																	
9	C201	69.6°C	82.4°C																																																																	
10	Q100	60.0°C	73.4°C																																																																	
11	LF100	52.9°C	66.1°C																																																																	
12	C105	60.9°C	74.3°C																																																																	
13	C107	53.0°C	66.2°C																																																																	
14	R18	97.0°C	109.3°C																																																																	
15	TC	66.6°C	79.1°C																																																																	
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 295VAC/200VAC O/P: FULL LOAD Ta= -25°C	TEST: OK																																																																
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 40 °C NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=40 °C HUMIDITY= 95% R.H	TEST: OK																																																																
4	TEMPERATURE COEFFICIENT	±0.03%/°C (0~40°C)	I/P: 230 VAC O/P: FULL LOAD	±0.006%/°C (0~40°C)																																																																
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45°C ~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: STATIC		TEST: OK																																																																
6	THERMAL SHOCK TEST	1. Thermal shock Temperature: -25°C ~ +45°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 10 CYCLE 5. Input/Output condition: 230VAC/Full Load AC ON/OFF TEST AC on 3 sec/AC off 1 sec TEST		TEST: OK																																																																





45W PWM Output LED Driver

**IDLV-45 series**

7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 2G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
8	CAPACITOR LIFE CYCLE	IDLV-45-36: SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta= 40 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 40 °C LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 40 °C LIFE TIME	(1) 381013 HRS (2) 145427 HRS (3) 208270 HRS (4) 301975 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 4229.8K hrs min. Telcordia SR-332 (Bellcore) ; 434.9K hrs min. MIL-HDBK-217F (25°C)	
10	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure(Expected Life) : 30,000 hours @ Tcase 85°C ; 50,000 hours @ Tcase 75°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	CHENZH/ZHUOKB	SKY	LIUWY